


XT-1 UHF Reader

Automatic Vehicle Identification

Key features:

- Easy-to-use and install
- Attractive price/performance
- Robust and weatherproof design, IP66
- Read range up to 8m (26ft)
- Operates with passive UHF tags

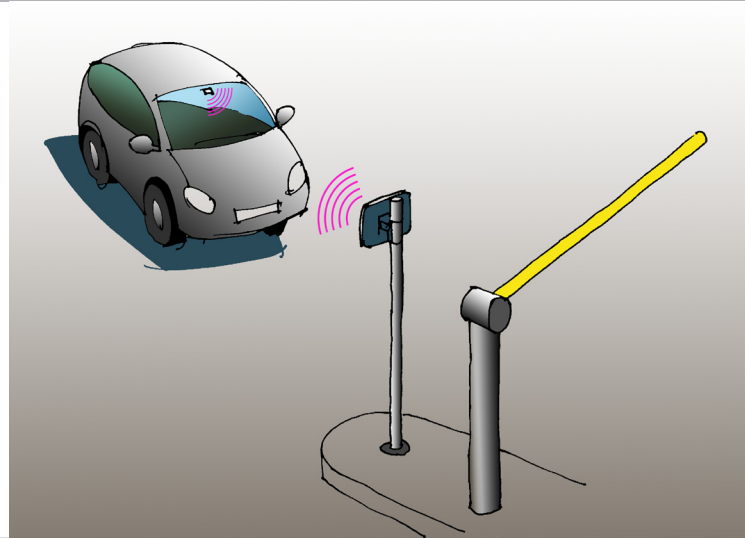

The XT-1 Reader is designed and optimised for Access and Parking applications:

- Commercial & Employee Parking
- Residential Areas
- Industrial Areas

A technical innovation

The TagMaster XT-1 Reader is designed with a unique combination of high quality components and a competitive price, which makes the XT-1 the most innovative reader in the market.

The XT-1 can be integrated into your existing access control and facility management software, to create a total solution designed to meet your unique needs.

Cost effective installation

The XT-1 is an "All in One" reader with integrated antenna which makes it easy and quick to install.

The built in Ethernet switch makes it easy to connect multiple readers which makes it possible to use software for multi-lane analysis and antipass-back functionality. The XT-1 has extensive varieties of interfaces, besides Ethernet; RS232, RS485 and Wiegand/Magstripe.

The XT-1 has quick configuration for the most common access control systems. You will find more information in the Easy configuration list, 14-102.

The unique DNA of TagMaster products is characterized of long read range, long product life time and low cost of use.

Its weatherproof design, with IP66 rating, ensures that the reader is an excellent choice for outdoor use as well as for indoor use.

EPC Gen2 standard

The TagMaster XT-1 is fully compliant with the EPC Gen2 (ISO 18000-6C) standard and reads all passive ID-tags compliant with this standard.

The XT-1 includes TagMaster's SecureMarkID ID-Tag format, which is developed to ensure that each UHF ID-tag has a unique identity which is difficult to duplicate.

The XT-1 combined with our SecureMarkID ID-Tags provides a higher level of security.

Part No. information:

XT-1 reader, EU	152500
XT-1 reader, US, Americas	152600
Universal Mounting Kit (optional)	193600

XT-1 UHF Reader



Reader specification

EPC Gen2 UHF

Operating frequencies	Area 1: 865.6-867.6 MHz Europe Area 2: 902-928 MHz US, Americas
Read range	Up to 8 metres (26ft) with TagMaster UHF tags with SecureMarkID.
Dimensions	300x300x60 mm /(11.8x11.8x2.4 in)
Weight	2.3kg (5.1 Ibs)
Protection	IP66
Operating temperature	-40°C (-40°F) to +60°C (+140°F)
Housing	Aluminum housing UL94 certified plastic XENOY™ cover
Power supply	12-24 VDC supply
Power consumption	10W (max 12W)
Output power	EU: 2W (e.r.p). US: 4W (e.i.r.p)
Input	3 isolated inputs
Output	3 isolated outputs shared with Wiegand/Magstripe
Relay	1 relay output, 60VDC, 2A
Interfaces	RS232, RS485, Wiegand/Magstripe, 2 pcs Ethernet and USB service interface
Certificates	CE Certificate according to R&TTE-Directive 1999/5/EC and FCC
Standards	EPC Gen2 (ISO 18000-6C)
LED indicator	Red/Green/Yellow
Communication protocols	TAGP and various OEM protocols. More information in TagMaster manuals
Encrypted air interface	According to EPC Gen2 (ISO 18000-6C)
EMC	EN 301489-1, EN 301489-3
Safety	EN 60950-1, EN 60950-22
Manuals and documentation	Installation Manual
Part No.	Area 1: 152500. Area 2: 152600